


WireLUX - Premium Audio Cables

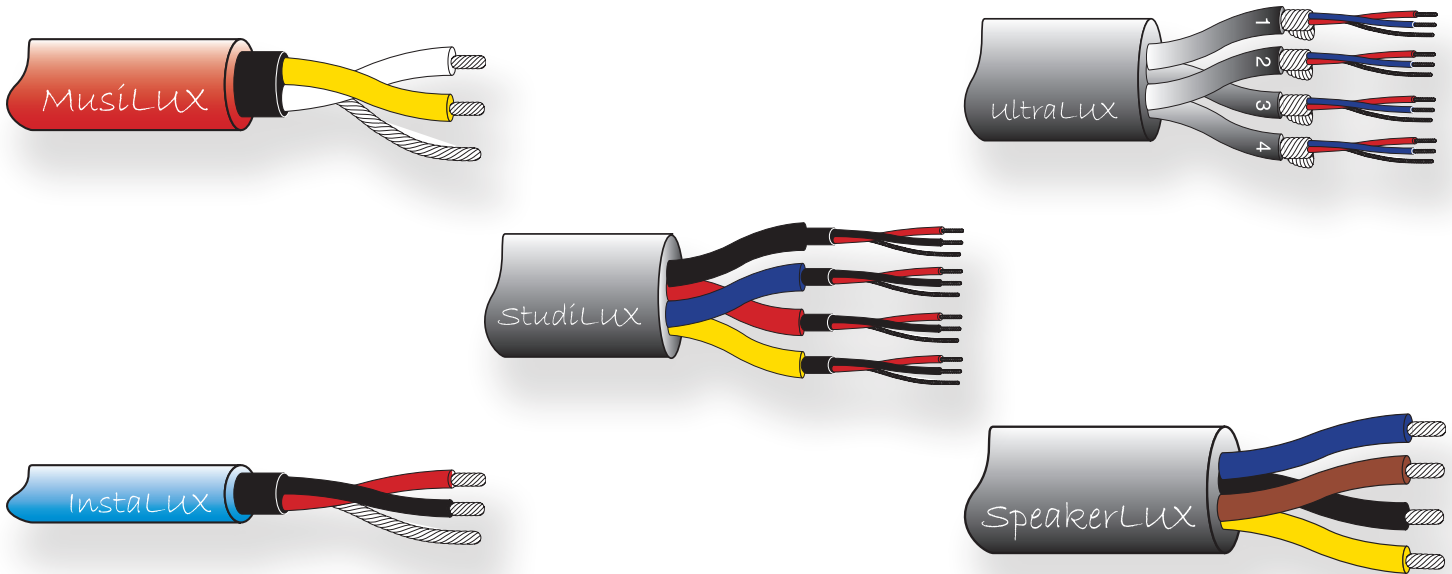

WireLUX is Wireworks own line of audio cables. Each product is carefully designed and crafted to provide luxurious flexibility while meeting specs stringent enough to satisfy the most demanding professionals, studio technicians, engineers and musicians.

WireLUX is the most flexible range of specialized audio cables available. You don't have to fight this cable! It stays super pliant in the wide range of temperatures usually encountered and, because it has virtually no memory, it lays out flat and, after the event, is easy to coil and store.

But that's just part of the story. The WireLUX products are designed to have superior durability. The jacketing material, although extremely flexible, is designed to resist damage and abrasion while at the same time helping to maintain the integrity of the conductor positioning.

WireLUX cables are used extensively worldwide and feature in the widest range of installations and on-the-road systems. From Broadway to large and small churches, from network broadcasting to local bands, from headliners to film-makers and from touring military bands to major sports events you will find WireLUX cabling standing up to the hard work of being used every day.

100% shielding

Shielding is vital in many audio cables and WireLUX has it! MusiLUX, InstaLUX and StudiLUX cables all have 100% shielding so you don't have to worry about interference from outside. The shielding is achieved by means of an extruded carbon loaded conductive thermoplastic shielded which surrounds the conductors in each pair. A drain wire is included to facilitate termination. The result is a shield that won't break, crack or deteriorate with use and remains effective throughout the life of the cable.

The incredible "One Second Strip"

A 100% shield is great with an audio cable but can make the preparation of the cable into a really painful experience. NOT SO WITH WireLUX! The MusiLUX, InstaLUX and StudiLUX cables all feature the incredible "One Second Strip" advantage! The tedium of preparing a cable for termination has been removed. There is no spiral, or worse yet, braided shield to tackle after the outer jacket has been removed. With WireLUX, a basic strip tool handles the jacket and the shield in one action – the incredible One Second Strip. Then remove the jackets on the conductors and you are ready to finalize the termination. It's easy, simple and fast. This will save you a lot of time and heartache!

WireLUX Professional Audio Cables

Features Overview




Ultimate professional microphone cable - 100% shielded - "incredible 1 second strip", in black, brown, red, orange, yellow, green, blue, violet, grey, and white satin-finish jackets.

One pair 22 AWG (30x36) BC conductors, 0.015" PE color coded insulation, 100% CTP shield with 22 AWG (30x36) BC drain wire, 0.029" UFPVC satin finish jacket available in 10 resistor colors. Overall diameter: 0.25" in 500 Ft. spools, weight: 19 lbs.




Ideal color-coded installation cable - small diameter, easy and fast termination and 100% shielded, in black, brown, red, orange, yellow, green, blue, violet, grey, and white jackets.

One pair 24 AWG (7x32) TC conductors, 0.01" PVC color coded insulation, 100% CTP shield with 24 AWG (7x32) TC drain wire, 0.016" UFPVC satin finish jacket available in 10 resistor colors. Overall diameter: 0.15" in 500 Ft. spools, weight: 10 lbs.

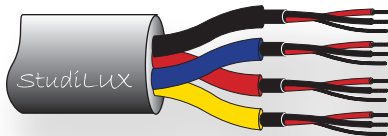


Luxurious fast-strip multi-channel interconnection cable - contains four or eight, 100% shielded, color coded InstaLUX cables, covered with a black satin finish jacket.

Four or eight color coded InstaLUX cables in a 0.05" UFPVC black satin finish outer jacket. Jacket thickness/overall diameter/500 Ft. spool weight: StudiLUX4 - 0.05"/0.47"/54 lbs.; StudiLUX8 - 0.05"/0.64"/109 lbs.

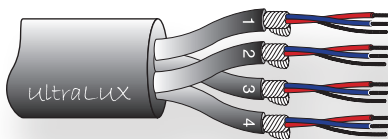

Superb multipair interconnect cable - ultra flexible, black satin jacket, in four, eight, twelve and sixteen channels each with a numbered jacket.

Four, eight, twelve or sixteen pairs 26 AWG (30x40) OFBC, 0.01" XLPE insulation, 99% spiral shield (96x38) OFBC with 26 AWG (7x34) OFTC drain wire. UFPVC black satin finish outer jacket. Jacket thickness/overall diameter/500 Ft. spool weight: UltraLUX4 - 0.03"/0.37"/32 lbs.; UltraLUX8 - 0.05"/0.49"/61 lbs.; UltraLUX12 - 0.06"/0.62"/94 lbs.; UltraLUX16 - 0.06"/0.68"/127 lbs.

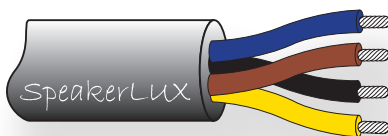

Super-flexible loudspeaker cable - 49 strand 13 AWG conductors, black satin finish pressure extruded jacket, in two, four, six and eight conductors.

Two, four, six or eight 13 AWG (49x30) BC conductors, 0.028" color coded insulation. UFPVC black satin finish outer jacket. Jacket thickness/overall diameter/500 Ft. spool weight: SpeakerLUX2 - 0.039"/0.36"/47 lbs.; SpeakerLUX4 - 0.039"/0.43"/71 lbs.; SpeakerLUX6 - 0.043"/0.50"/100 lbs.; SpeakerLUX8 - 0.047"/0.57"/127 lbs.